




REV	DESCRIPTION	DATE
01	INITIAL RELEASE	12/08/2020

THE BEST WAY TO DETERMINE CORRECT LOCKER OPENING SIZE IS TO MEASURE FROM CENTER TO CENTER ON THE BOLTS ON TOP OF THE OPENING AS SHOWN TO THE RIGHT.

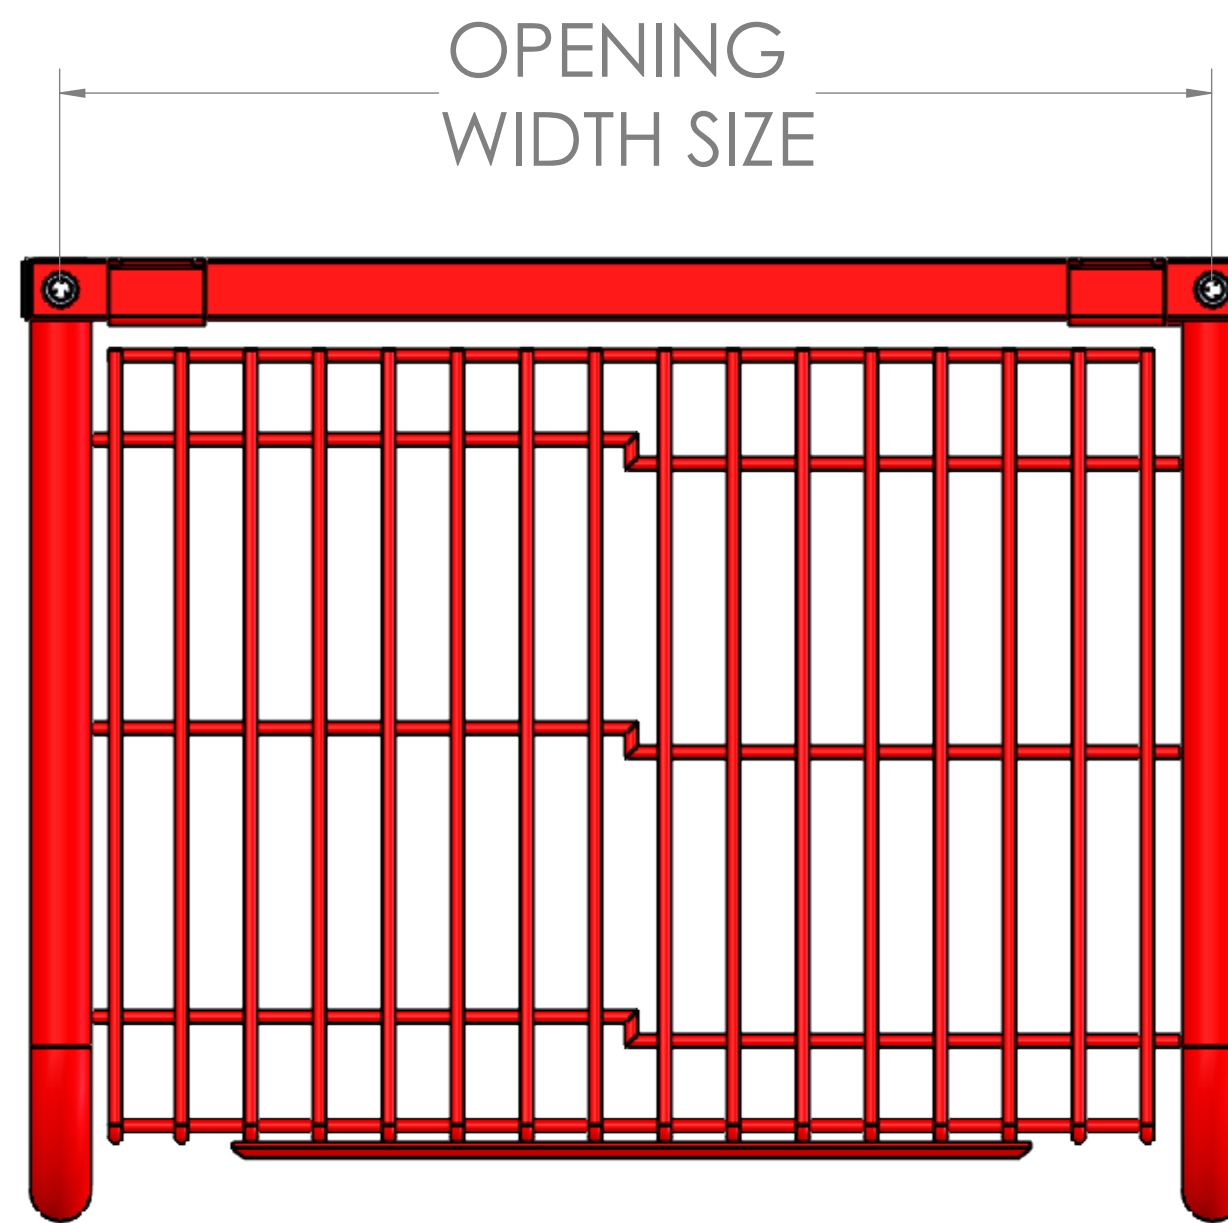

TOP VIEW:  
LOOKING  
DOWN ON  
LOCKER

DEPTH OF LOCKER CAN BE DETERMINED BY MEASURING FROM WALL TO FRONT OF ROUND TUBE AS SHOWN BELOW

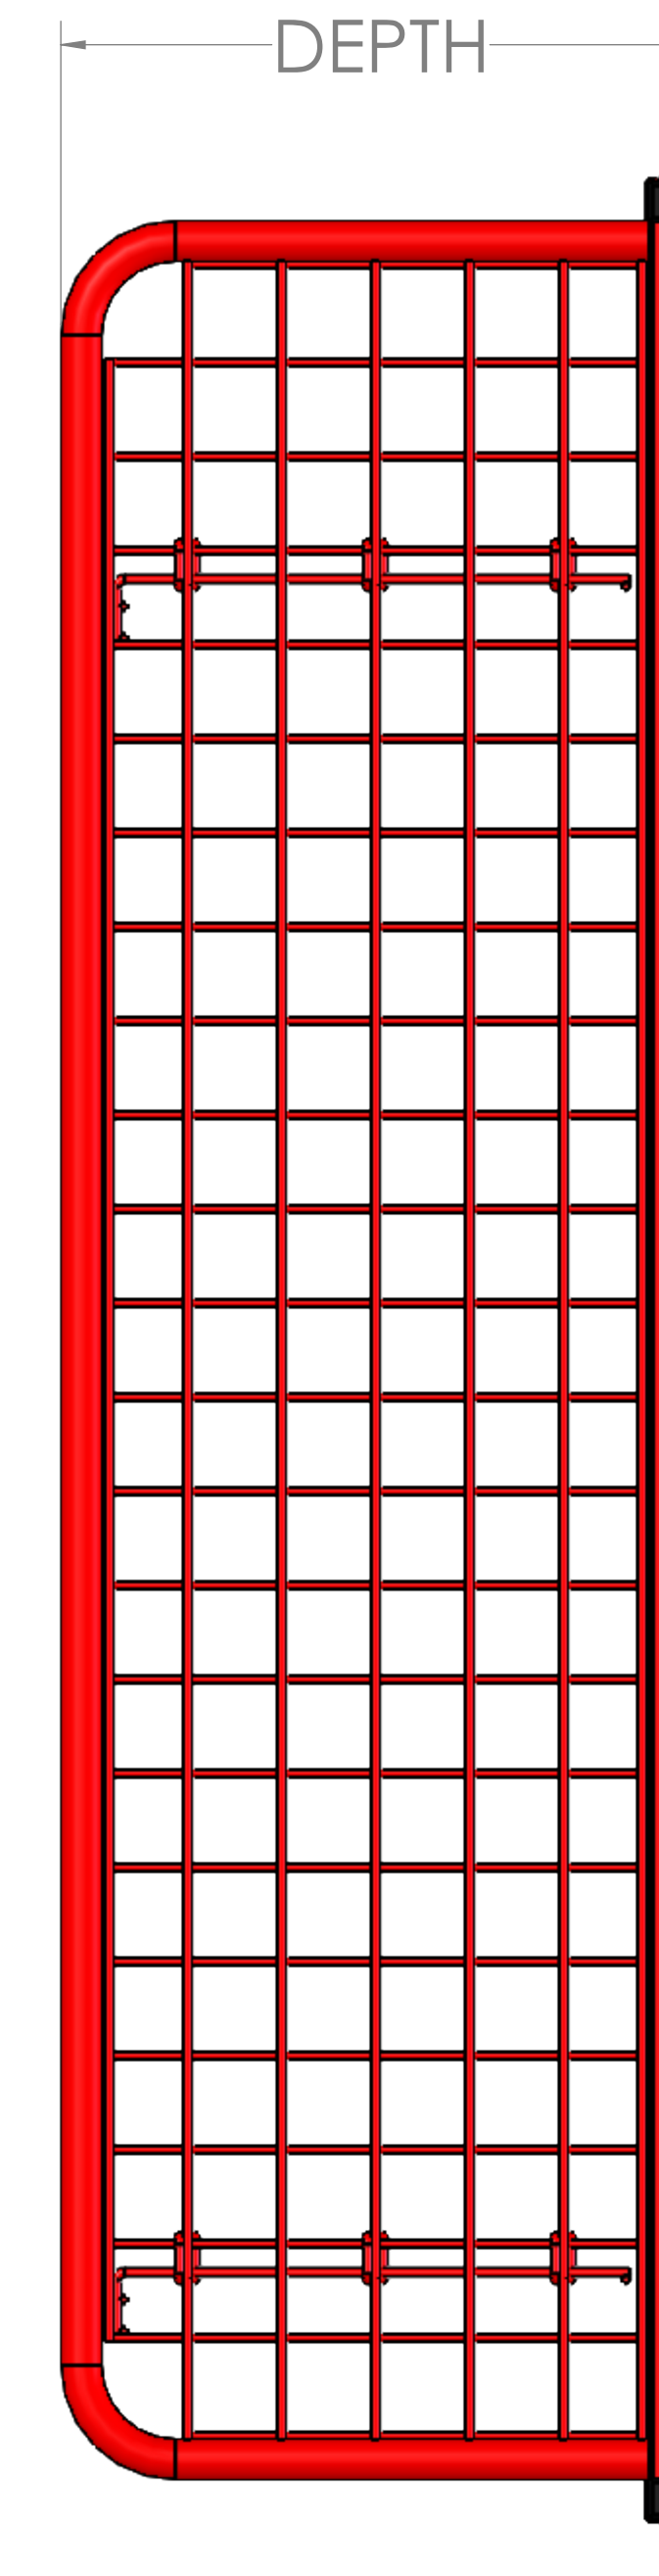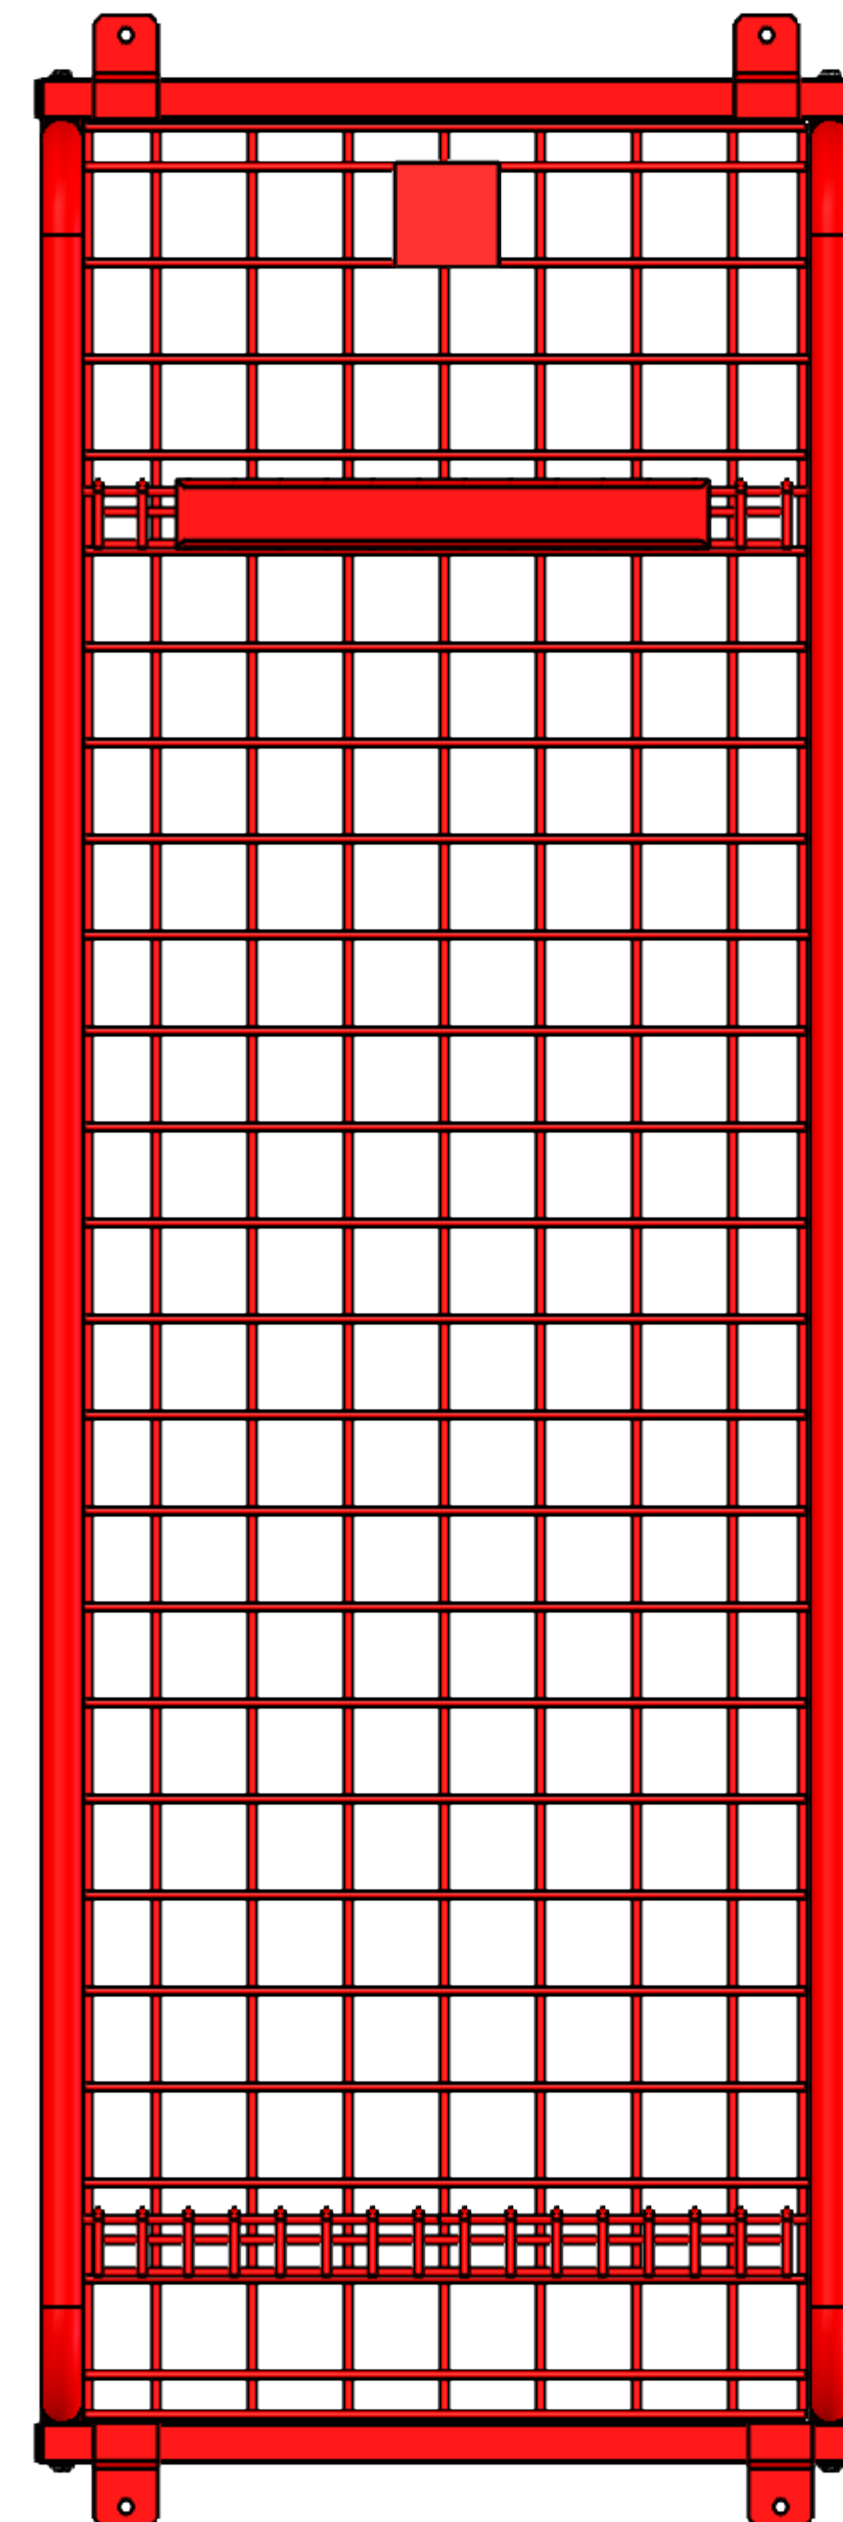

SIDE VIEW

<b>GEARGRID</b> <small>PROPRIETARY AND CONFIDENTIAL</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF GEARGRID CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF GEARGRID CORPORATION IS PROHIBITED.</small> <small>INTERPRET DIM AND TOLERANCE PER ASME Y14.5M/1994</small> <small>THIRD ANGLE PROJECTION</small>	<small>DRAWN</small> LUKE B.	<small>NAME</small> LUKE B.	<small>DATE</small> 12-08-2020	<small>TITLE:</small> <b>LOCKER SIZE, GUIDE</b>	
	<small>ENGINEER</small>	<small>UNLESS OTHERWISE SPECIFIED:</small> <small>DIMENSIONS ARE IN INCHES</small> <small>TOLERANCES:</small> <small>ANGLE MACHINED ±.5°</small> <small>ANGLE FORMED ±1°</small> <small>TWO PLACE .XX ±.03</small> <small>THREE PLACE .XXX ±.010</small> <small>HOLE Ø ±.005</small>	<small>WARRANTY</small> REF CUT SHEET		<small>FINISH</small> SEE NOTES
<small>SIZE</small>				<small>PART NO.</small>	<small>REV</small>
<small>DO NOT SCALE DRAWING</small>				<small>SHEET 1 OF 1</small>	<small>1</small>